



OG8401/N - Opus 800
Natural Gas Counter-top
Chargrill - W 600 mm -
13.8 kW

Embrace the unique power and versatility of the Opus 800 Three-Zone Gas Chargrill, which provides three heat zones which are capable of maintaining different temperatures on the same surface, allowing you to cook chicken fillets only inches away from steaks.

- ✓ Three heat zones which are capable of maintaining different temperatures on the same surface, allowing you to cook chicken fillets only inches away from steaks. Individual zones can be turned off during quiet periods.
- ✓ Highly powerful infra-red burners respond quicker and heat faster than standard burners allowing you to increase your output and achieve energy savings
- ✓ Heavy-duty cast iron branding grids with reversible design, for uninterrupted cooking and self cleaning at maximum power
- ✓ Flame failure protection
- ✓ Heavy duty radiant caps protect burners

Specifications

Summary

| | |
|-----------------------------|-----------------------------------|
| Range Name | Opus 800 |
| Power Type | Gas |
| Gas Type | Natural Gas |
| Unit Type | Counter-top |
| Available in UK Only | No |
| UK Warranty | 2 Years Parts and Labour Warranty |
| Export Warranty | Contact your local dealer |
| GTIN Code | 5056105102816 |

Power and Performance

| | |
|--|------------|
| BTU per Hour | 47,086 |
| Total Power kW | 13.8 |
| Cooking Area (Width x Depth) mm | 500 x 620 |
| Temperature Control | Mechanical |

Key Specifications

| | |
|-----------------------------|---|
| Number of Heat Zones | 3 |
|-----------------------------|---|

Weights and Dimensions

| | |
|----------------------------------|------|
| Unit Height (External) mm | 653 |
| Unit Width (External) mm | 600 |
| Unit Depth (External) mm | 806 |
| Net Weight Kg | 80.5 |

Supply Connections

| | |
|--|--------|
| Requires Installation | Yes |
| Requires Electrical Supply | No |
| Gas Connection BSP | 1/2" |
| Gas Consumption at full rate Natural m³ per Hour | 1.24 |
| Gas Pressure Natural mbar | 20.0 |
| Total heat input at full rate Natural kW | 13.8 |
| Total heat input at full rate Natural BTU per hour | 47,087 |

Shipping

| | |
|-------------------------|----|
| Packed Weight Kg | 92 |
| Packed Height cm | 63 |
| Packed Width cm | 70 |
| Packed Depth cm | 85 |


Available Accessories

| | |
|-------------|-----------------------------|
| CH01 | CATERFLEX HOSE 1/2" 1 METRE |
|-------------|-----------------------------|

Available Accessories

| | |
|-----------------|--|
| CH02 | CATERFLEX HOSE 1/2" 1.5 METRE |
| OA8950 | Opus 800 Free-standing Floor Stand with Legs - for units W 600 mm |
| OA8950/C | Opus 800 Free-standing Floor Stand with Castors - for units W 600 mm |
| RC03M | RADIANT COVER - OPUS 800 - UNDER DEVELOPMENT |

Technical Picture

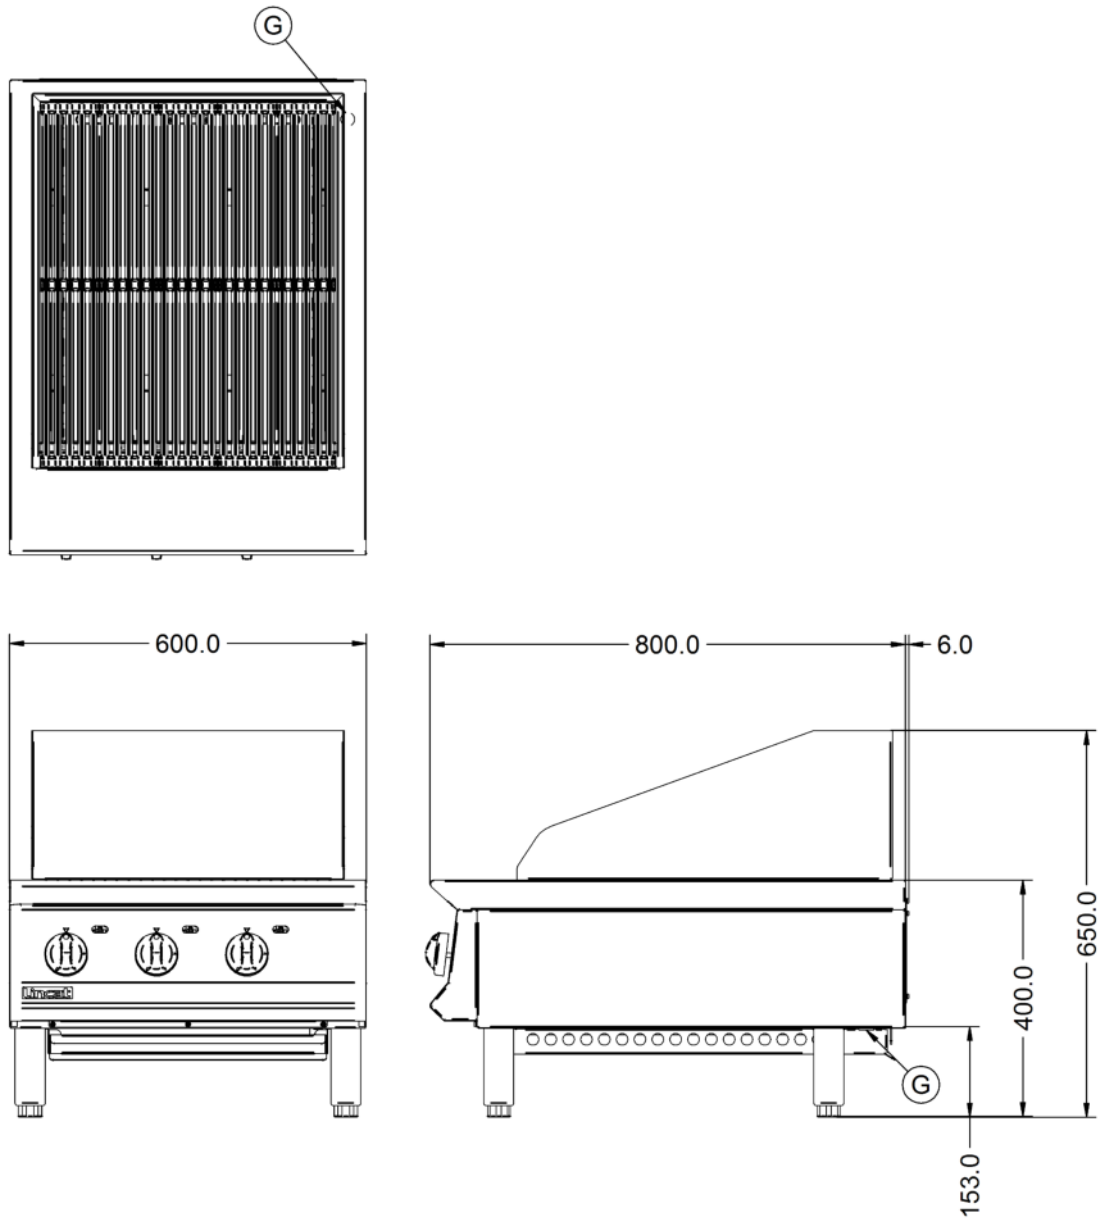



Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 503250
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm