turbofan

HSERIES

Technical data sheet for H10D-FS HOLDING CABINET - FULL SIZE

10 Tray Electric Holding Cabinet DIGITAL CONTROL



STANDARD FEATURES

- Designed for individual use or system installed with Turbofan E32D Convection Ovens
- 10 full size 460mm x 660mm / 18" x 26" sheet pan capacity
- 74mm tray spacing
- Compact 735mm width
- 220-240V plug-in 13A cordset fitted
- 1900W cabinet heating
- Full double skin construction
- Digital display Temperature and Timer controls
- Large easy view 20mm high displays
- Electronic temperature control
- 3 hold timers
- Continuous door seal
- Low velocity circulation fan system
- Dual halogen cabinet interior lamps
- Cabinet drain to condensate pan
- 4 dia. 76mm castors with 2 front castors with wheel and swivel lock, 2 rigid rear castors
- 100% recyclable packaging

d

H10D-FS

Unit shall be a Moffat electrically heated Turbofan Holding Cabinet. NSF.4 listed. The holding cabinet shall have double skin construction with stainless steel interior and exterior sides, front and top. Door shall be side hinged. Unit shall have capacity for 10 full size 460mm x 660mm / 18" x 26" sheet pans. A single speed fan shall gently and evenly circulate air around the cabinet. Cabinet shall be controlled by a Digital display electronic Temperature and Timer controller. 3 hold timers shall be standard. Holding cabinet shall be mounted on castors, with two rigid castors at rear and two castors, swivel and wheel lock at front. Holding Cabinet shall operate independently or in conjunction with Moffat Turbofan E32D Convection Oven. Holding Cabinet shall be fitted with a 13A cordset. Unit shall be supplied in 100% recyclable shipping packaging.



turbofan

H10D-FS 10 Tray Electric Full Size Holding Cabinet DIGITAL CONTROL

CONSTRUCTION

304 stainless steel interior cabinet Stainless steel front, sides and top exterior Stainless steel interior side racks Stainless steel frame, side hinged door 5mm thick door glass Stainless steel control panel Aluminised coated steel base and rear panels

CONTROLS

Electronic controls with Digital Time and Temperature displays Large 20mm high LED displays ON/OFF key Cabinet lamp key Temperature set and actual key 3 timer keys Timer range up to 4 hours Timers countdown or count-up modes Temperature range 20- 90°C

CLEANING


Stainless steel top and side exterior panels Removable plug-in oven door seal (no tools required) SPECIFICATIONS

Electrical Requirements 220-240V, 50Hz, 1-phase, 2.05kW, 8.5A 220-240V, 60hz, 1 phase, 2.05kW, 8.5A 13A cordset fitted

External Dimensions Width 735mm Height 1015mm including dia. 76mm castors Depth 810mm Nett Weight 88kg Packing Data

107kg 0.97m³ Width 780mm 1295mm Height 960mm Depth INSTALLATION CLEARANCES Rear 25mm LH Side 0mm RH Side 0mm CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is required

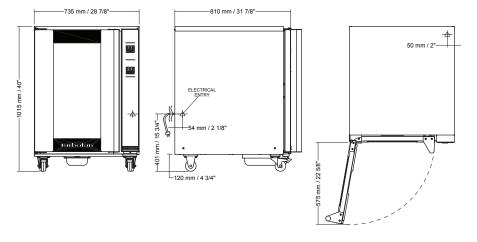

HSERIES

H10D-FS

(• BLUE SEAL)

blue-seal.co.uk turbofanoven.com

United Kingdom

Blue Seal Limited Unit 67 Gravelly Business Park Gravelly Birmingham B24 8TQ England Telephone 0121-327 5575 Facsimile 0121-327 9711 sales@blue-seal.co.uk www.blue-seal.co.uk

Australia

Moffat Pty Limited 740 Springvale Road Mulgrave, Victoria 3170 Australia Telephone 03-9518 3888 Facsimile 03-9518 3833 vsales@moffat.com.au www.moffat.com.au

New Zealand Moffat Limited

Christchurch 45 Illinois Drive Izone Business Hub Rolleston 7675 Telephone +64 3-983 6600 Facsimile +64 3-983 6660 sales@moffat.co.nz www.moffat.co.nz



ISO9001 Quality Management Standard

Designed and manufactured by

ISO9001 All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd UK.TFN.S.1601

